



NISSAN
NP300 DC 1Pce

Installation Instructions for
Primed
Hard Tonneau Cover

Place these instructions in vehicle's glove box after installation is complete.

IMPORTANT: Check that all listed components of this kit detailed in this document are present.

Item	Component Name	QTY
1	Primed lid	1
2	Fitting Instructions	1
3	Foam Tape Kit	1
1	Fitting Kit	1

Tools & Safety Equipment :

Electric drill, Phillips head drill bit, Torx bit T40, 5mm Allen key, Stanley knife, Masking tape, marking pen or pencil.

Hearing Protection, Eye Protection and Gloves as required

1. Remove primed lid from the box. Turn the lid upside down and place the lid on a stand
2. Mask up carpet ready for painting
3. Turn lid over and prep for painting



CAUTION: Lid has been primed using PPG Autothane primer
The primed lid requires appropriate sanding for two pack paint application

Recommendation:

Dry—P500 Sand Paper

Wet—P800 Sand Paper

1. Paint the lid.
2. Make sure that there is a 4cm border of paint underneath the whole lid.
3. After paint has cured, detail lid
4. After finishing detailing flip the part over. Fit foam tape kit to lid.


NISSAN NP300 DC 1Pce Primed Lid

Foam Tape Kit

Item	Description	Qty	Size
1	32mm x 3mm Tape	1	1.8mt
2	90mm x 5mm Tape	2	1.5mt
3	90mm x 5mm Tape	1	1.7mt
4	90mm x 5mm Tape	2	0.2mt

Installing Foam Tape Kit

1. Turn Lid upside down making sure to protect paint work.
2. Apply the 32mm x 3mm x 1.8mt Tape across front of lid.
3. Apply the 1st 90mm x 5mm x 1.5mt tape on side of lid, starting at front and making a 45 degree cut at rear
4. Apply the 2nd 90mm x 5mm x 1.5mt tape on side of lid, starting at front and making a 45 degree cut at rear
5. Apply the .21mt tape from the side towards the rear following the shape of the rear, continue with the other side.
6. Apply the 90mm x 5mm x 1.7mt tape across the rear of the lid, Matching the 45 degree angle cuts in the rear corners as shown .

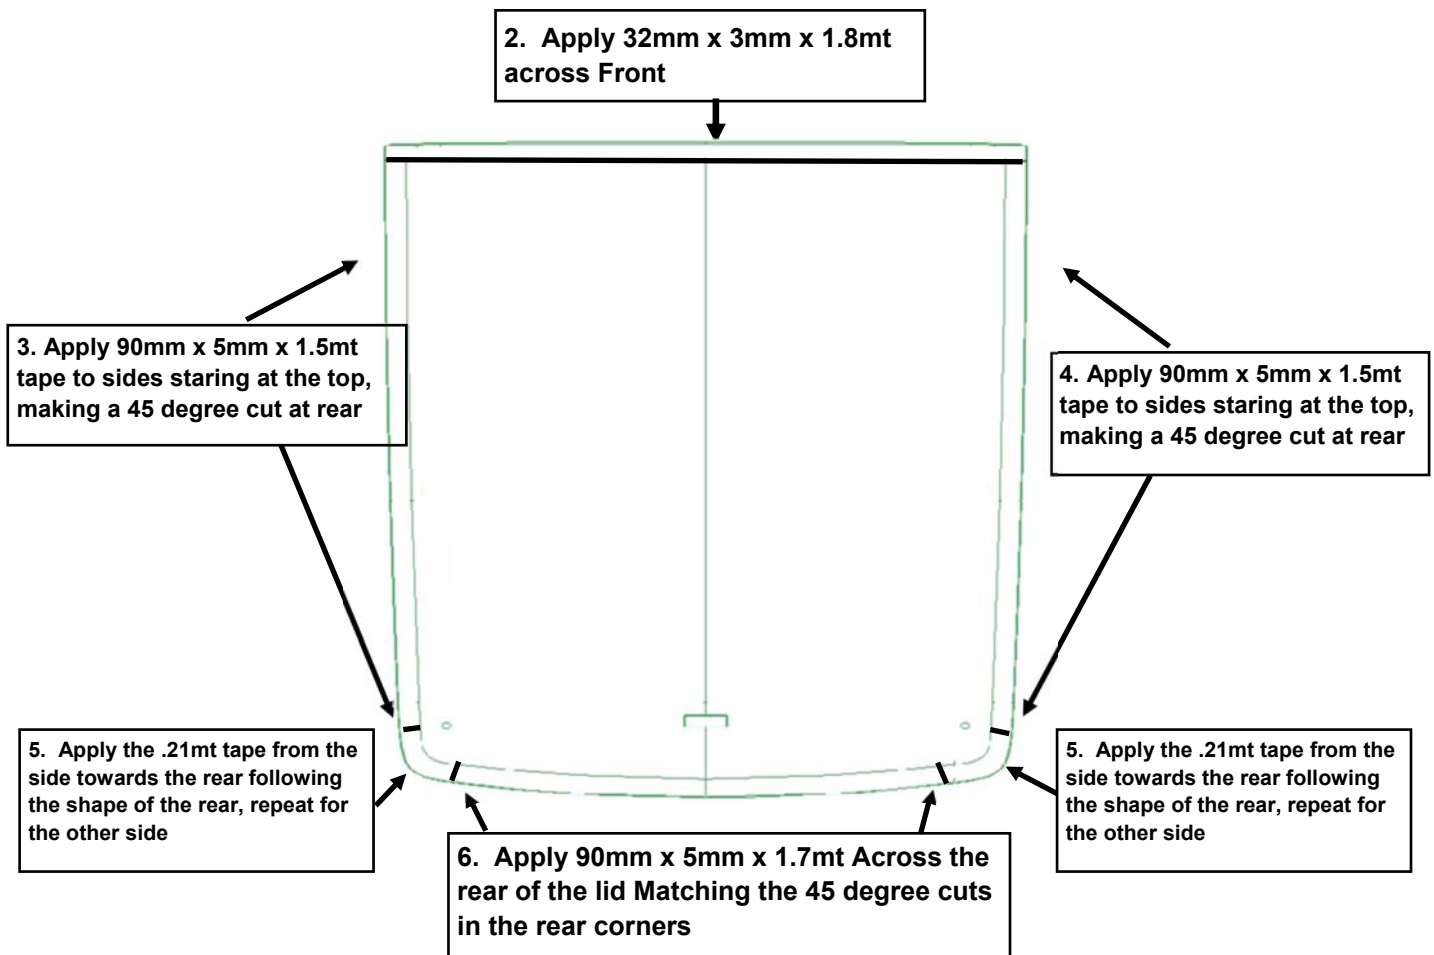

NISSAN NP300 DC 1Pce

FITTING INSTRUCTIONS

PLEASE READ THE FITTING INSTRUCTIONS BEFORE FITTMENT

This will ensure correct fitment and alignment of hard lid


1. Remove Black Header Rail attached to the front of the tub if installed. Also remove one bolt from each front corner of the tub. Throw away the 8 removed bolts as they are not required.
2. Apply non acidic silicon to the top edge of Nissan tub where the FBA 32 Bar will be installed to prevent leaking.
3. Install the Aluminium spacer bar and FBA 32 to the vehicle using M8 x 25mm Button head screws (8) and M8 Washers (8). After tightening, Wipe away any excess silicon.

Ensure spacer bar is installed between the ute body and the FBA 32.

4. Using the Alcohol wipe provided clean the top of FBA 32, wipe off any residue with a clean rag.
5. Apply the Cleanseal to FBA 32, ensuring that there is 70mm overhang on each side of the bar. The Cleanseal needs to be installed towards the tailgate side of FBA 32. The Fin of the Cleanseal also needs to face towards the tailgate. Fill any gaps remaining between the FBA 32 and the Nissan Tub with silicon and wipe away the excess.
6. Install the Lid to the Vehicle
7. Loosen the M6 x 25mm Button head screws (8) holding the hinges in place. Align the ute lid to the vehicle ensuring there are even gaps running around the exterior of the Lid to the Ute. Tighten the M6 x 25mm Button head screws when gaps are even.



8. With one person on each side carefully lift the lid off the ute and carefully turn the lid over. Ensuring the lid is adequately supported to prevent damage or scratches,

9. Remove the M6 x 20mm Phillips head screws (6) and install the Gas Strut Bracket to the lid using the M6 Phillips




10. Attach 250N Gas struts to the Ute Lid. Fit the **Cylinder end** of the Gas Strut to the strut balls (**Shaft end** attaches to the tub) A 'click' should be heard to ensure strut has locked onto ball.

11. Lift the lid with the gas struts attached until you find the desired height for the lid and mark the centre of the strut head to the vehicle. Do this step to one side only. Then measure from the FBA 32 Back and apply the same mark to the other side of the ute body.

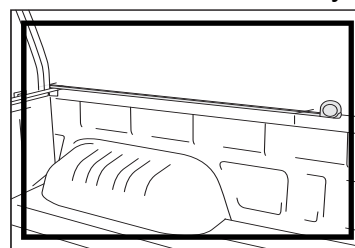

11. To install the Strut brackets to the ute the Ball must be pointing to the ground. Make sure the Ball is lined up with the mark made from step 10. Measure and mark 25mm down from the top edge of the tub. Install Strut Brackets with self drilling screws (4) at the 25mm point.

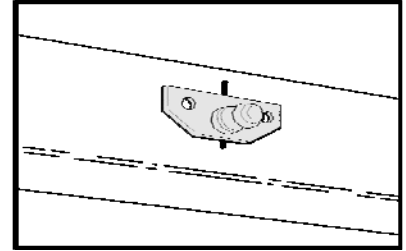

12. Free Fit the Lock Brackets to suit the Locks and install using self drilling screws (4). Do this by placing the key in the Lock and turning the striker to the sides of the tub. Hold the lock bracket in the desired position and drill into position. Note: Striker must pass under the lock bracket freely.

NOTE: Check Lid alignment behind the cabin, Lift the lid and insure that the lid has good clearance before driving to avoid damage to your vehicle.

Your utility should now look fantastic with its new lid fitted. Remember, when removing and re-fitting your Ute lid ensure that the hinges are fully engaged to avoid damaging or bending them.

MAINTENANCE: Painted Lids will need to be polished and kept clean just as you would the other painted areas of your vehicle. Regularly check that all brackets and screws are tight.

WARNING – Don't allow people or animals beneath the Lid. Don't place excessive weight on Lid. Always lock the Lid when driving or reversing.